


# SUNOR CATALOGUE

---

## SUNSHINE ORTHOPAEDICS

### Bone Plates

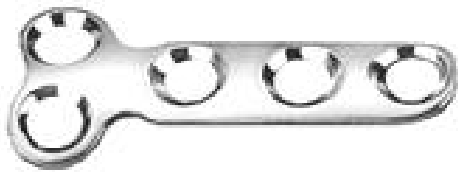

**Mini Fragment**

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Dynamic Compression Plates Mini**

Cat. No.	Sizes
146.02	02 Holes
146.03	03 Holes
146.04	04 Holes
146.05	05 Holes
146.06	06 Holes
146.07	07 Holes
146.08	08 Holes

**Profile:**

Thickness (4 to 6 holes) - 1.0mm  
(7 & 8 holes) - 1.5mm

Width - 5.0mm

Hole Spacing - 5.0mm

**Used with 2.0mm Screw**

**Dynamic Compression Plates Mini**

Cat. No.	Sizes
T-146.02	02 Holes
T-146.03	03 Holes
T-146.04	04 Holes
T-146.05	05 Holes
T-146.06	06 Holes
T-146.07	07 Holes
T-146.08	08 Holes

**Profile:**

Thickness (4 to 6 holes) - 1.0mm  
(7 & 8 holes) - 1.5mm

Width - 5.0mm

Hole Spacing - 5.0mm

**Used with 2.0mm Screw**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Finger Plates (Round Holes) with gap**

Cat. No.	Sizes
148.04-01	04 Holes
121.06-01	06 Holes

**Profile:**

- Thickness - 0.9mm
- Width - 5.0 mm
- Hole Spacing - 6.0mm

**Used with 2.0mm Screws**

**Finger Plates (Round Holes) with gap**

Cat. No.	Sizes
T-148.04-01	04 Holes
T-121.06-01	06 Holes

**Profile:**

- Thickness - 0.9mm
- Width - 5.0 mm
- Hole Spacing - 6.0mm

**Used with 2.0mm Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Finger Plates (Round Holes) with out gap

Cat. No.	Sizes
148.04-01	04 Holes
121.06-01	06 Holes

#### Profile:

Thickness - 0.9mm  
 Width - 5.0 mm  
 Hole Spacing - 6.0mm

**Used with 2.0mm Screws**

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Finger Plates (Round Holes) with out gap

Cat. No.	Sizes
T-148.04-01	04 Holes
T-121.06-01	06 Holes

#### Profile:

Thickness - 0.9mm  
 Width - 5.0 mm  
 Hole Spacing - 6.0mm

**Used with 2.0mm Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Dynamic Compression Plates Mini**

Cat. No.	Sizes
150.02	02 Holes
150.03	03 Holes
150.04	04 Holes
150.05	05 Holes
150.06	06 Holes
150.07	07 Holes
150.08	08 Holes
150.09	09 Holes
150.10	10 Holes

**Profile**

Thickness (upto 6 holes) - 2.0mm  
 (7 to 12 holes) - 2.5mm  
 Width - 8.0mm  
 Hole Spacing - 8.0mm and 12.0mm

**Used with 2.7mm Screws**

**Dynamic Compression Plates Mini**

Cat. No.	Sizes
T-150.02	02 Holes
T-150.03	03 Holes
T-150.04	04 Holes
T-150.05	05 Holes
T-150.06	06 Holes
T-150.07	07 Holes
T-150.08	08 Holes
T-150.09	09 Holes
T-150.10	10 Holes

**Profile**

Thickness (upto 6 holes) - 2.0mm  
 (7 to 12 holes) - 2.5mm  
 Width - 8.0mm  
 Hole Spacing - 8.0mm and 12.0mm

**Used with 2.7mm Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Right/Left L - Plate**

Cat. No.	Sizes
152.01-L	Left
152.02-R	Right

**Profile**

Thickness - 1.2mm  
Width - 7.0mm  
Hole Spacing - 8.0mm

**Used with 2.7mm Screws**

**Right/Left L - Plate**

Cat. No.	Sizes
T-152.01-L	Left
T-152.02-R	Right

**Profile**

Thickness - 1.2mm  
Width - 7.0mm  
Hole Spacing - 8.0mm

**Used with 2.7mm Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**T - Plate**

Cat. No.	Sizes
152.03-T	T

**Profile**

Thickness - 1.2mm  
 Width - 7.0mm  
 Hole Spacing - 8.0mm

**Used with 2.7mm Screws**

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile


**T - Plate**

Cat. No.	Sizes
T-152.03-T	T

**Profile**

Thickness - 1.2mm  
 Width - 7.0mm  
 Hole Spacing - 8.0mm

**Used with 2.7mm Screws**

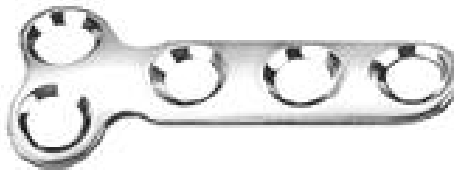

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Straight Reconstruction Plate**

Cat. No.      Sizes  
154.03-22    03 Holes to 22 Holes

**Profile**

Thickness - 3.1mm  
Width - 8.0mm  
Hole Spacing - 8.0mm

**Used with 2.7mm Screws**

**Straight Reconstruction Plate**

Cat. No.      Sizes  
T-154.03-22    03 Holes to 22 Holes

**Profile**

Thickness - 3.1mm  
Width - 8.0mm  
Hole Spacing - 8.0mm

**Used with 2.7mm Screws**





**Small Fragment**

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Straight Reconstruction Plate**

Cat. No.	Sizes
166.03-22	03 Holes to 22 Holes

**Profile**

Thickness - 2.8mm  
Width - 10.0mm

**USED with 3.5mm Screws**

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Straight Reconstruction Plate**

Cat. No.	Sizes
T-166.03-22	03 Holes to 22 Holes

**Profile**

Thickness - 2.8mm  
Width - 10.0mm

**USED with 3.5mm Screws**

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**T - Plate Oblique Angle**

Cat. No.      Sizes  
 170.03-05    03 Holes to 05 Holes  
 For the Left and Right Radius. Fixation with 3.5 & 4.0mm screws. Head with three holes.

**Profile**

Thickness - 1.5mm  
 Width - 10.0mm

**Used with 3.5mm Screws**

**T - Plate Oblique Angle**

Cat. No.      Sizes  
 170.03-05    03 Holes to 05 Holes  
 For the Left and Right Radius. Fixation with 3.5 & 4.0mm screws. Head with three holes.

**Profile**

Thickness - 1.5mm  
 Width - 10.0mm

**Used with 3.5mm Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**One Third Tubular Plate**

Cat. No.	Sizes
160.04-12	04 Holes to 12 Holes

Used With 3.5mm Screws

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**One Third Tubular Plate**

Cat. No.	Sizes
T-160.04-12	04 Holes to 12 Holes

Used With 3.5mm Screws



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Y- Reconstruction Plate for Humeral**

Cat. No.	Sizes
172.06-12	06 Holes to 12 Holes

Used With 3.5mm Screws

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Y- Reconstruction Plate for Humeral**

Cat. No.	Sizes
T-172.06-12	06 Holes to 12 Holes

Used With 3.5mm Screws



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Dynamic Compression Plates Small**

Cat. No.      Sizes  
 175.02-12    02 Holes to 12 Holes  
 For Radius & Ulna

**Profile**

Thickness - 3.5mm  
 Width - 10.0mm  
 Hole Spacing - 12.0 and 16.0mm

Used with 3.5mm Screws

**Dynamic Compression Plates Small**

Cat. No.      Sizes  
 T-175.02-12    02 Holes to 12 Holes  
 For Radius & Ulna

**Profile**

Thickness - 3.5mm  
 Width - 10.0mm  
 Hole Spacing - 12.0 and 16.0mm

Used with 3.5mm Screws



**Large Fragment**

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Semi Tubular Plates**

Cat. No.	Sizes
190.02-14	02 Holes to 14 Holes

Fixation with 4.5 mm cortical screws.  
A compression effect can be achieved by eccentric positioning of the screws remote from the fracture line

**Profile**

Thickness - 1.0mm  
Width - 11.0mm  
Hole Spacing - 16.0 and 26.0mm

Used with 4.5mm Screws

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Semi Tubular Plates**


Cat. No.	Sizes
T-190.02-14	02 Holes to 14 Holes

Fixation with 4.5 mm cortical screws.  
A compression effect can be achieved by eccentric positioning of the screws remote from the fracture line

**Profile**

Thickness - 1.0mm  
Width - 11.0mm  
Hole Spacing - 16.0 and 26.0mm

Used with 4.5mm Screws

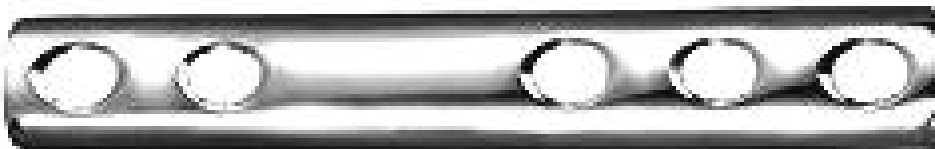

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Straight Reconstruction Plate**

Cat. No.      Sizes  
 192.03-16    03 Holes to 16 Holes

**Profile**

Thickness - 2.8mm  
 Width - 12.0mm  
 Holes Spacing - 16.0mm

**Used with 4.5mm**

**Straight Reconstruction Plate**

Cat. No.      Sizes  
 T-192.03-16    03 Holes to 16 Holes

**Profile**

Thickness - 2.8mm  
 Width - 12.0mm  
 Holes Spacing - 16.0mm

**Used with 4.5mm**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Limited Contact Dynamic Compression Plate (L C-D C P) Narrow

Cat. No.	Sizes
194.04-10	04 Holes to 10 Holes

Fixation with 4.5 and 6.5 mm screws.  
The LC-DCP holes allow compression in both directions of the longitudinal axis.  
The end holes can be used for cancellous bone screws.

**Undercuts** : For reduced vascular damage.

**Indication:** As a neutralisation and tension band plate on the tibia (**not intended for the femur**).

#### Profile

Thickness - 4.6mm  
Width - 13.5mm  
Hole Spacing - 18.0mm

**Used with 4.5mm Screws**

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Limited Contact Dynamic Compression Plate (L C-D C P) Narrow

Cat. No.	Sizes
T-194.04-10	04 Holes to 10 Holes

Fixation with 4.5 and 6.5 mm screws.  
The LC-DCP holes allow compression in both directions of the longitudinal axis.  
The end holes can be used for cancellous bone screws.

**Undercuts** : For reduced vascular damage.

**Indication:** As a neutralisation and tension band plate on the tibia (**not intended for the femur**).

#### Profile

Thickness - 4.6mm  
Width - 13.5mm  
Hole Spacing - 18.0mm

**Used with 4.5mm Screws**





Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Limited Contact Dynamic Compression Plate (L C-D C P) Broad**

Cat. No.	Sizes
196.06-16	06 Holes to 16 Holes

Fixation with 4.5 and 6.5 mm screws.

The LC-DCP holes allow compression in both directions of the longitudinal axis.

The end holes can be used for cancellous bone screws.

Undercuts : For reduced vascular damage.

**Indication:** As a tension band plate on the Femur and for Humeral pseudarthrosis

**Profile**

- Thickness - 6.0mm
- Width - 17.5mm
- Hole Spacing - 18.0mm

**used with 4.5mm Screws**

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Limited Contact Dynamic Compression Plate (L C-D C P) Broad**

Cat. No.	Sizes
T-196.06-16	06 Holes to 16 Holes

Fixation with 4.5 and 6.5 mm screws.

The LC-DCP holes allow compression in both directions of the longitudinal axis.

The end holes can be used for cancellous bone screws.

Undercuts : For reduced vascular damage.

**Indication:** As a tension band plate on the Femur and for Humeral pseudarthrosis

**Profile**

- Thickness - 6.0mm
- Width - 17.5mm
- Hole Spacing - 18.0mm

**used with 4.5mm Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Dynamic Compression Plates Narrow

Cat. No.	Sizes
198.02-16	02 Holes to 16 Holes

Fixation with 4.5 and 6.5 mm screws.

All holes are designed as self-compressing holes. All the end holes are designed for cancellous bone screws.

**Indication:** As a neutralization and tension band plate on the tibia (**not intended for the femur**).

#### Profile

Thickness - 3.6 mm  
Width - 12.0 mm  
Hole Spacing - 16.0 and 25.0mm

**Used with 4.5mm Screws**

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Dynamic Compression Plates Narrow

Cat. No.	Sizes
T-198.02-16	02 Holes to 16 Holes

Fixation with 4.5 and 6.5 mm screws.

All holes are designed as self-compressing holes. All the end holes are designed for cancellous bone screws.

**Indication:** As a neutralization and tension band plate on the tibia (**not intended for the femur**).

#### Profile

Thickness - 3.6 mm  
Width - 12.0 mm  
Hole Spacing - 16.0 and 25.0mm

**Used with 4.5mm Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Cloverleaf Plate**

Cat. No.      Sizes  
 164.03-08      03 Holes to 08 Holes

For distal Intra-Articular Tibial Fractures. Fixation with 3.5 & 4.0 mm screws.

**Profile**

Thickness - 2.0mm  
 Width - 15.2mm  
 Cloverleaf Thickness - 1.2mm


**Cloverleaf Plate**

Cat. No.      Sizes  
 T\_164.03-08      03 Holes to 08 Holes

For distal Intra-Articular Tibial Fractures. Fixation with 3.5 & 4.0 mm screws.

**Profile**

Thickness - 2.0mm  
 Width - 15.2mm  
 Cloverleaf Thickness - 1.2mm

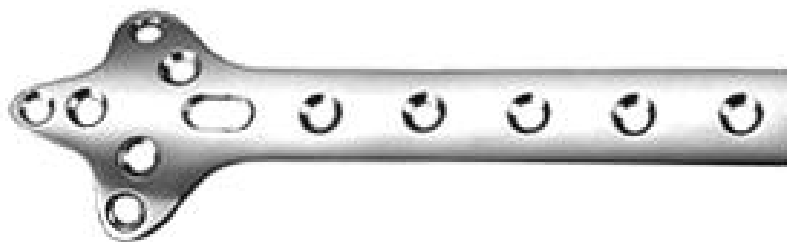

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Dynamic Compression Plates Broad

Cat. No.	Sizes
206.05-18	05 Holes to 18 holes

Fixation with 4.5 and 6.5 mm screws.  
All holes are designed as self-compressing holes.  
All the end holes are designed for cancellous bone screws.

**Indication:** As a tension band plate on the femur and for humeral pseudoarthrosis (**not intended for the tibia**).

Use broad plates with six or seven holes in exceptional cases only, e.g. on the humerus.

#### Profile

Thickness - 4.5mm  
Width - 16.0mm  
Hole Spacing - 16.0 and 25.0mm

Used with 4.5mm Screws

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Dynamic Compression Plates Broad

Cat. No.	Sizes
T-206.05-18	05 Holes to 18 holes

Fixation with 4.5 and 6.5 mm screws.  
All holes are designed as self-compressing holes.  
All the end holes are designed for cancellous bone screws.

**Indication:** As a tension band plate on the femur and for humeral pseudoarthrosis (**not intended for the tibia**).

Use broad plates with six or seven holes in exceptional cases only, e.g. on the humerus.

#### Profile

Thickness - 4.5mm  
Width - 16.0mm  
Hole Spacing - 16.0 and 25.0mm

Used with 4.5mm Screws



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**T - Plate for Humerus & Tibia Head**

Cat. No.	Sizes
208.03-08	03 Holes to 08 Holes

Shaft with round profile, for humeral and tibial head. Fixation with 4.5 & 6.5 mm screws.

**Profile**

Thickness - 2.0mm  
Width - 17.0mm

**Used with 4.5mm Screws**

**T - Plate for Humerus & Tibia Head**


Cat. No.	Sizes
T-208.03-08	03 Holes to 08 Holes

Shaft with round profile, for humeral and tibial head. Fixation with 4.5 & 6.5 mm screws.

**Profile**

Thickness - 2.0mm  
Width - 17.0mm

**Used with 4.5mm Screws**

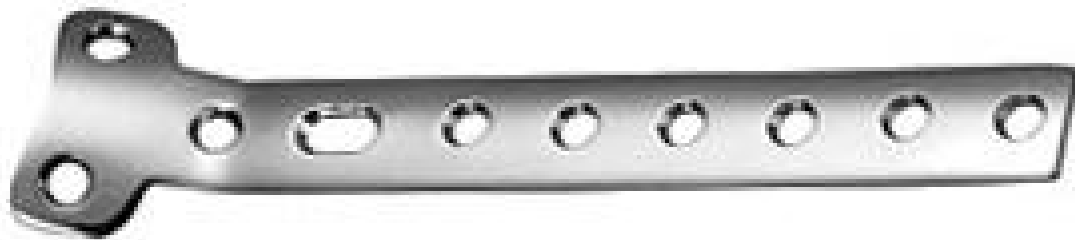

Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### T - Buttress Plate with double bend for Tibia Head

Cat. No.	Sizes
210.04-06	04 Holes to 06 Holes

With double bend, as buttress for tibial head fractures. Fixation with 4.5 & 6.5 mm screws.

#### Profile

Thickness - 2.0mm  
Width - 17.0mm

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### T - Buttress Plate with double bend for Tibia Head

Cat. No.	Sizes
210.04-06	04 Holes to 06 Holes

With double bend, as buttress for tibial head fractures. Fixation with 4.5 & 6.5 mm screws.

#### Profile

Thickness - 2.0mm  
Width - 17.0mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**L - Buttress Plates for Tibia Head**

Cat. No.	Sizes
212.03-06L	03 Holes to 06 Holes Right
212.03-06R	03 Holes to 06 Holes Left

With double bend, as buttress for tibial and humeral head fractures. Left angled for right leg & right angled for left leg.

**Profile**

Thickness - 2.0mm  
Width - 16.0mm

**L - Buttress Plates for Tibia Head**

Cat. No.	Sizes
T-212.03-06L	03 Holes to 06 Holes Right
212.03-06R	03 Holes to 06 Holes Left

With double bend, as buttress for tibial and humeral head fractures. Left angled for right leg & right angled for left leg.

**Profile**

Thickness - 2.0mm  
Width - 16.0mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Cobra Head Plate for Hip Arthrodesis

Cat. No.	Sizes
216.08-11	08 Holes to 11 Holes

Shaft with DCP dynamic compression holes and slot for tension device. For arthrodesis of the hip.

In the two shaft holes next to the head, two 4.5 mm cortical screws, length 68 mm, are normally used.

#### Shaft Profile

Thickness - 6.0mm  
Width - 16.0mm  
Hole Spacing - 16.0mm

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Cobra Head Plate for Hip Arthrodesis

Cat. No.	Sizes
T-216.08-11	08 Holes to 11 Holes

Shaft with DCP dynamic compression holes and slot for tension device. For arthrodesis of the hip.

In the two shaft holes next to the head, two 4.5 mm cortical screws, length 68 mm, are normally used.

#### Shaft Profile

Thickness - 6.0mm  
Width - 16.0mm  
Hole Spacing - 16.0mm





Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Spoon Plates**

Cat. No.	Sizes
218.06	06 Holes

Shaft with V-profile for the fixation on the frontal edge of the tibia. Fixation with 4.5 mm cortical screws.

**Profile**

Thickness - 3.0mm  
Head Width - 33.0mm


**Spoon Plates**

Cat. No.	Sizes
218.06	06 Holes

Shaft with V-profile for the fixation on the frontal edge of the tibia. Fixation with 4.5 mm cortical screws.

**Profile**

Thickness - 3.0mm  
Head Width - 33.0mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Condylar Buttress Plates for Right Leg

Cat. No.	Sizes
220.07-15	07 Holes to 15 Holes

With DCP dynamic compression holes and slot for tension device. As buttress for the femoral condyles with multiple fragment fractures.

#### Shaft Profile

Thickness - 5.0mm  
Width - 16.0mm  
Hole Spacing - 16.0mm

Used with 4.5mm Cortex Screws and 6.5mm Cancellous Screws

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Condylar Buttress Plates for Right Leg

Cat. No.	Sizes
220.07-15	07 Holes to 15 Holes

With DCP dynamic compression holes and slot for tension device. As buttress for the femoral condyles with multiple fragment fractures.

#### Shaft Profile

Thickness - 5.0mm  
Width - 16.0mm  
Hole Spacing - 16.0mm

Used with 4.5mm Cortex Screws and 6.5mm Cancellous Screws



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Condylar Buttress Plates for Left Leg**

Cat. No.      Sizes  
 222.07-15      07 Holes to 15 Holes

With DCP dynamic compression holes and slot for tension device. As buttress for the femoral condyles with multiple fragment fractures.

**Shaft Profile**

Thickness - 5.0mm  
 Width - 16.0mm  
 Hole Spacing - 16.0mm

**used with 4.5mm Cortex Screws and 6.5mm Cancellous Screws**

**Condylar Buttress Plates for Left Leg**

Cat. No.      Sizes  
 T-222.07-15      07 Holes to 15 Holes

With DCP dynamic compression holes and slot for tension device. As buttress for the femoral condyles with multiple fragment fractures.

**Shaft Profile**

Thickness - 5.0mm  
 Width - 16.0mm  
 Hole Spacing - 16.0mm

**used with 4.5mm Cortex Screws and 6.5mm Cancellous Screws**



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Condylar Plate 95° with Round Holes

Cat. No.	Sizes
224.04-12	04 Holes to 12 Holes

Blade Length: 50mm, 60mm, 70mm, 80mm

#### Profile

Thickness - 5.6mm  
 Width - 16.0mm  
 Hole Spacing - 16.0mm  
 U-profile blade - 6.5x16.0mm

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Condylar Plate 95° with Round Holes

Cat. No.	Sizes
T-224.04-12	04 Holes to 12 Holes

Blade Length: 50mm, 60mm, 70mm, 80mm

#### Profile

Thickness - 5.6mm  
 Width - 16.0mm  
 Hole Spacing - 16.0mm  
 U-profile blade - 6.5x16.0mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Lateral Tibial Head Buttress Plate**

Cat. No.	Sizez
225.05-15L	05 Holes to 15 Holes Left
225.05-15R	05 Holes to 15 Holes Right

**Lateral Tibial Head Buttress Plate**

Cat. No.	Sizez
T-225.05-15L	05 Holes to 15 Holes Left
T-225.05-15R	05 Holes to 15 Holes Right



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Condylar Plate 95° with DCP Holes

Cat. No.	Sizes
226.04-12	04 Holes to 12 Holes

Blade Length: 50mm, 60mm, 70mm, 80mm

#### Profile

Thickness - 5.6mm

Width - 16.0mm

Hole Spacing - 16.0mm

U-profile blade - 6.5x16.0mm

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Condylar Plate 95° with DCP Holes

Cat. No.	Sizes
T-226.04-12	04 Holes to 12 Holes

Blade Length: 50mm, 60mm, 70mm, 80mm

#### Profile

Thickness - 5.6mm

Width - 16.0mm

Hole Spacing - 16.0mm

U-profile blade - 6.5x16.0mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Angled Blade Plate 130° with DCP Holes**

Cat. No.	Sizes
230.04-12	04 Holes to Holes

Blade Length: 50mm, 60mm, 70mm, 80mm

With DCP dynamic compression holes and slot for tension device (from 6 holes up).  
 These plates have an angle of 130° between blade and shaft. Fixation with 4.5 mm cortical screws. For femoral neck and pertrochanteric fractures.

**Profile**

- Thickness - 5.6 mm
- Width - 16mm
- Hole Spacing - 16.0mm
- U-profile blade - 6.5x16mm

**Angled Blade Plate 130° with DCP Holes**

Cat. No.	Sizes
T-230.04-12	04 Holes to Holes

Blade Length: 50mm, 60mm, 70mm, 80mm

With DCP dynamic compression holes and slot for tension device (from 6 holes up).  
 These plates have an angle of 130° between blade and shaft. Fixation with 4.5 mm cortical screws. For femoral neck and pertrochanteric fractures.

**Profile**

- Thickness - 5.6 mm
- Width - 16mm
- Hole Spacing - 16.0mm
- U-profile blade - 6.5x16mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Intertrochanteric Femur Osteotomy Plates for Adults - 90° with Dynamic Holes

Cat. No.      Sizes  
234.04      04 Holes

Blade Length: 50mm to 75mm

With DCP dynamic compression holes and slot for tension device. Fixation with 4.5 mm cortical screws. The hole in the bend enables fixation of the calcar femors with a long cortical screw.

#### Profile

Thickness - 5.6mm

Width - 16.0mm

Hole Spacing - 16.0mm

U-Profile Blade - 6.5x16.0mm

Displacement T

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### Intertrochanteric Femur Osteotomy Plates for Adults - 90° with Dynamic Holes

Cat. No.      Sizes  
T-234.04      04 Holes

Blade Length: 50mm to 75mm

With DCP dynamic compression holes and slot for tension device. Fixation with 4.5 mm cortical screws. The hole in the bend enables fixation of the calcar femors with a long cortical screw.

#### Profile

Thickness - 5.6mm

Width - 16.0mm

Hole Spacing - 16.0mm

U-Profile Blade - 6.5x16.0mm

Displacement T





Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Intertrochanteric Femur Osteotomy Plates for Adults - 130° with Dynamic Holes**

Cat. No.      Sizes  
 236.04      04 Holes  
 Blade Length: 65mm to 85mm  
 With DCP dynamic compression holes and slot for tension device.  
 Fixation with 4.5 mm cortical screws. For repositioning osteotomies in the treatment of femoral neck pseudarthroses and fractures.

**Profile**

Thickness - 5.6mm  
 Width - 16.0mm  
 Hole Spacing - 16.0mm  
 U-profile blade - 6.5x16.0mm

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**Intertrochanteric Femur Osteotomy Plates for Adults - 130° with Dynamic Holes**

Cat. No.      Sizes  
 T-236.04      04 Holes  
 Blade Length: 65mm to 85mm  
 With DCP dynamic compression holes and slot for tension device.  
 Fixation with 4.5 mm cortical screws. For repositioning osteotomies in the treatment of femoral neck pseudarthroses and fractures.

**Profile**

Thickness - 5.6mm  
 Width - 16.0mm  
 Hole Spacing - 16.0mm  
 U-profile blade - 6.5x16.0mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**DHS / DCS lag Screw with Compression Screw**

Cat. No.	Sizes
238.50-120	50 mm to 120mm

**Profile**

Thread Diameter - 12.5mm  
 Thread Length - 22.0mm  
 Shaft Diameter - 8.0mm

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**DHS / DCS lag Screw with Compression Screw**

Cat. No.	Sizes
T-238.50-120	50 mm to 120mm

**Profile**

Thread Diameter - 12.5mm  
 Thread Length - 22.0mm  
 Shaft Diameter - 8.0mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**DHS Barrel Plates Round Holes, 125°, 130°, 135°, 140°**

Cat. No.	Sizes
240.02-16	02 Holes to 16 Holes

Fixation with 4.5mm cortial screws.

For pertochanteric and intertrochanteric fractures.

**Profile**

- Thickness-5.8mm
- Width-19.0mm
- Hole Spacing-16.0mm
- OuterBarrelDiameter-12.6mm
- Barrel Length-38mm
- Short Barrel Length -25MM

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**DHS Barrel Plates Round Holes, 125°, 130°, 135°, 140°**

Cat. No.	Sizes
T-240.02-16	02 Holes to 16 Holes

Fixation with 4.5mm cortial screws.

For pertochanteric and intertrochanteric fractures.

**Profile**

- Thickness-5.8mm
- Width-19.0mm
- Hole Spacing-16.0mm
- OuterBarrelDiameter-12.6mm
- Barrel Length-38mm
- Short Barrel Length -25MM



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### DHS Barrel Plates DCP Holes, 125°, 130°, 135°, 140°

Cat. No.	Sizes
241.02-16	02 Holes to 26 Holes

With DCP dynamic compression holes and slots for tension device

Fixation with 4.5mm cortical screws.

For pertochanteric and intertrochanteric fractures.

#### Profile

Thickness-5.8mm

Width-19.0mm

Hole Spacing-16.0mm

OuterBarrelDiameter-12.6mm

Barrel Length-38mm

ShortBarrel Length -25MM

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### DHS Barrel Plates DCP Holes, 125°, 130°, 135°, 140°

Cat. No.	Sizes
T-241.02-16	02 Holes to 26 Holes

With DCP dynamic compression holes and slots for tension device

Fixation with 4.5mm cortical screws.

For pertochanteric and intertrochanteric fractures.

#### Profile

Thickness-5.8mm

Width-19.0mm

Hole Spacing-16.0mm

OuterBarrelDiameter-12.6mm

Barrel Length-38mm

ShortBarrel Length -25MM



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

**DCS Barrel Plate 95° with DCP Holes**

Cat. No.      Sizes  
 242.06-16    06 Holes to 16 Holes

With DCP dynamic compression holes and slot for tension device.

Fixation with 4.5 mm cortical screws. For condylar fractures, avoids further damage to the bone.

**Profile**

- Thickness - 5.4mm
- Width - 16.0mm
- Hole Spacing - 16.0mm
- Barrel Length - 25 mm

**DCS Barrel Plate 95° with DCP Holes**

Cat. No.      Sizes  
 T-242.06-16    06 Holes to 16 Holes

With DCP dynamic compression holes and slot for tension device.

Fixation with 4.5 mm cortical screws. For condylar fractures, avoids further damage to the bone.

**Profile**

- Thickness - 5.4mm
- Width - 16.0mm
- Hole Spacing - 16.0mm
- Barrel Length - 25 mm



Material	Stainelss Steel 316 L
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### DHS Double Angled Barrel Plate, 120°, 125°, 130°, 135°

Cat. No.	Sizes
243.04-06	04 Holes to 06 Holes

Neglected Fracture neck Femur where Intertrochanteric osteotomy required. Fixation with 4.5mm cortical Screws.  
DCS Instrument set required.

#### Profile

Thickness -5.4mm  
Width -16mm

Material	Titanium AL6V4 Eli
Packing	01 Pc
Sterile/Non-Sterile	Non-Sterile

### DHS Double Angled Barrel Plate, 120°, 125°, 130°, 135°

Cat. No.	Sizes
243.04-06	04 Holes to 06 Holes

Neglected Fracture neck Femur where Intertrochanteric osteotomy required. Fixation with 4.5mm cortical Screws.  
DCS Instrument set required.

#### Profile

Thickness -5.4mm  
Width -16mm



# SUNSHINE ORTHOPAEDICS

Regd. Office:

Plot No. 1350, HSIIDC Phase V, Rai Industrial Estate,  
Dist. Sonapat (Haryana) - 131029 INDIA

Phone: 91-130-2367948

Fax: 91-130-2367949

E-mail: [nitin@sunor.org](mailto:nitin@sunor.org)

Web Site: <http://www.sunor.org>